


Model: Nautic Lux I Air (1500), drop-in		With deck-mount faucet (optional)	Size :1500*750*610mm
---	--	-----------------------------------	----------------------


No.	Configuration	Sketch	1 unit	Qty.
1	HP0.25pump (220V,50HZ)		set1	
2	Stainlesssteel overflow		pc1	
3	Side air holes at the tub bottom		circ-1	2
4	Mid air holes at the tub bottom		line	
5	Chromatherapy lamp		pc10	
6	B6S-F touch control system		set1	
7	1.2m drain pipe		set1	
8	Sealed floor drain		set1	
9	Pop-up drain		pc1	

No.	Configuration(optional)	sketch	unit	Qty.
1	Cross hand wheel faucet (3 pieces)		set	3
2	Square bend waterfall		pc	1
3	Square hand shower		pc	1
4	Round hand wheel drain		pc	1

Product parameter list	
Rated power/voltage /current of pump	200W/220VAC/0.9A
Drain pipe	Internal diameter≥50mm
Maximum water consumption (L)	260

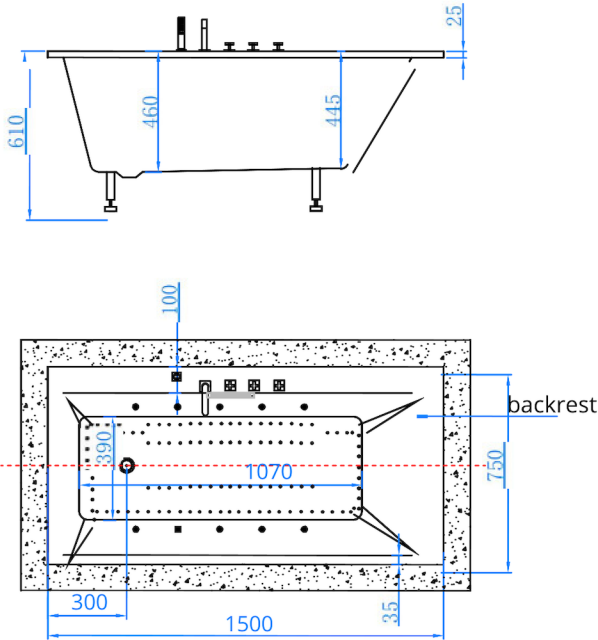

Plane Graph

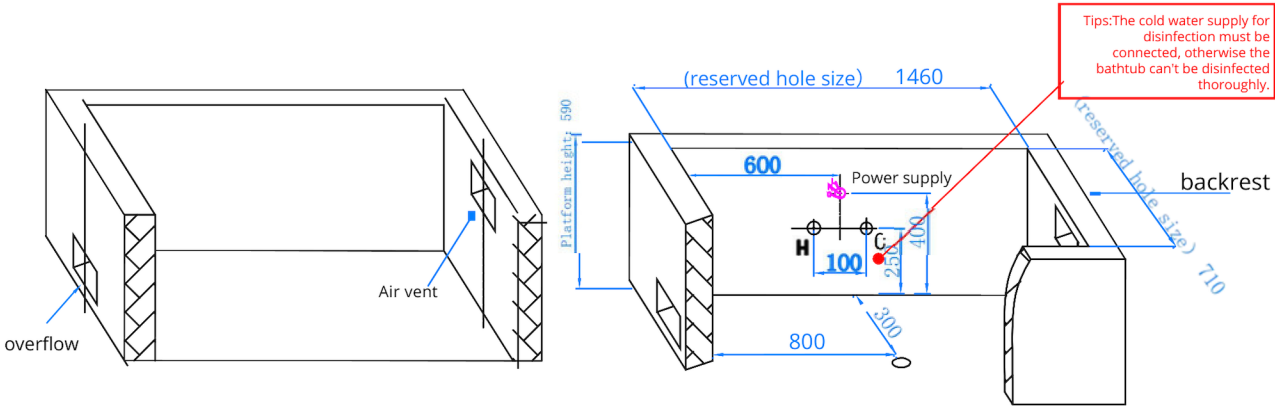

Water & Power Supply Connection

- Drain (DIA.≥50mm,to drain waste water),in same level with the ground.
- cold/hot water supply pipe (reservedlength30mm,G12"metricexternalhthread H=hot water, C=cold water,used for waterfall water in)
- Power wire (length 200mm,square numbers of electric wire:3X2.5mm².) Product should connect earth wire.

Note: For the built-in tubs with electric parts,the platform must have ventilator/overflow/safety hole as required. The drainpipe should be sealed as the instruction.If the tubs are installed incorrectly, factory will not responsible for the electric part when there is something wrong.